

Heating unit ZGR

Technical description


Characteristic

- compact housing
- high efficiency
- mounting with: flange or thread
- use of tubular heating element packages
- degree of head protection: IP66
- the radiator can be extended with a thermostat


Application

- Immersion heaters are used for:
- hot water installations
 - oil pre-heating
 - flow heaters
 - air heaters
 - pressure tanks

Power	(1,5 ÷ 40) kW
Voltage	230 V, 400 V, 3x400 V, other
Length [mm]	250÷4750
Diameter [mm]	ø6,5; 8,5; 10; 16 other
Material	steel: 1.4301, 1.4404, 1.4541, 1.4571, 1.4828, 1.4876, 2.4858, Cu
Connection head	steel, stainless steel, brass
Degree protection	IP66
Dead zone	100 mm
Thermostats	TR (regulation), STB (check)

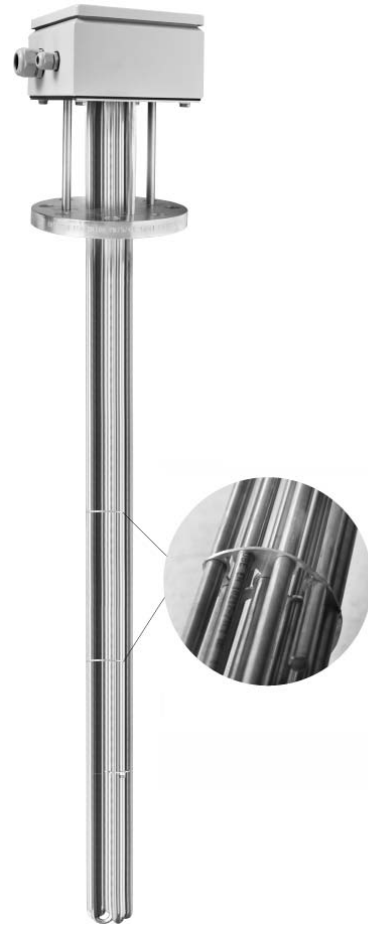

Connection diagram

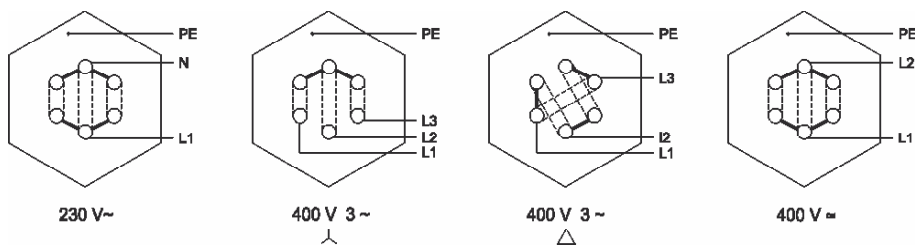

Ordering code

Heating unit	ZGR - ... - ... - ... / ... - ...
Diameter* [mm]	
Length* [mm]	
Power* [W]	
Voltage* [V]	
Connection type*: threaded flange	

* Acc. to requirements

Ordering example

Heating unit ZGR-6xø10x1695-6x6666W/400V